


### Cable droppers

■ **SHTF1,2/10V** Non- current feeding, adjustable

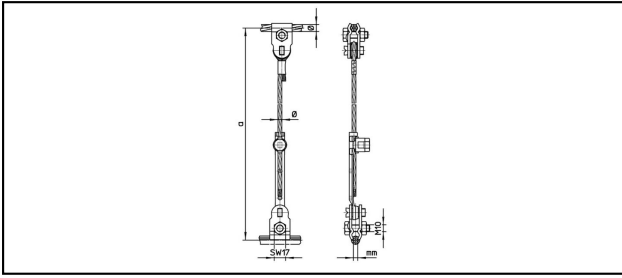

**Application**









For cable droppers, non-current feeding

**Characteristics**

Other lengths and contact wire grooves on request

**Material**

Clamp and adjustable part CuNiSi / Wire Bz 2

Article-Nr.	 mm Ø	 mm²	 mm	 mm a	 mm Ø	 mm²	 kN		 Kg
625.187.581	7.5 - 14	35 - 120	3.75 - 8.5	250 - 1300	4.5	10	1.3		0.512

Technical Specifications: **Non- current feeding, adjustable SHTF1,2/10V**

Article No.	625.187.581
<b>Length a</b>	250 - 1300 mm
<b>Catenary wire diameter</b>	7.5 - 14 mm
<b>Catenary wire section</b>	35 - 120 mm <sup>2</sup>
<b>Contact wire groove</b>	3.75 - 8.5 mm
<b>Dropper wire diameter</b>	4.5 mm
<b>Dropper wire section</b>	10 mm <sup>2</sup>
<b>Slipping force</b>	1.3 kN
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	0.512 kg

