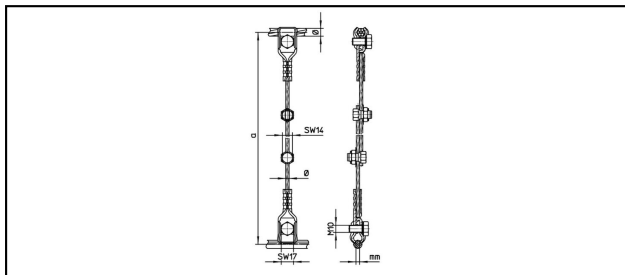


Seilhänger

■ SHTF4/25V

**Anwendung**

Für Fahrdrahtaufhängung, stromführend

Material

Klemme aus CuNiSi / Seil aus Bz 2

Artikel-Nr.									
625.559.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1250	7.5	25	5		0.7
625.560.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	7.5	25	5		0.774
625.561.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	7.5	25	5		0.844

Technische Spezifikationen: **SHTF4/25V**

	625.559.000	625.560.000	625.561.000
Länge a	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm
Tragseil Durchmesser	6.5 - 12.5 mm		
Tragseil Seilfläche	25 - 95 mm²		
Fahrdraht-Kerbe	3 - 8.5 mm		
Hängerseil Durchmesser	7.5 mm		
Hängerseil Fläche	25 mm²		
Ausreisskraft	5 kN		
Kommerzielle Spezifikation			
Zolltarifnummer	85359020		
Ursprungsland	unbestimmt	CH	
Logistische Spezifikation			
Kilo / Stück	0.7 kg	0.774 kg	0.844 kg

