


Conical coupler

KV232 Cone connector

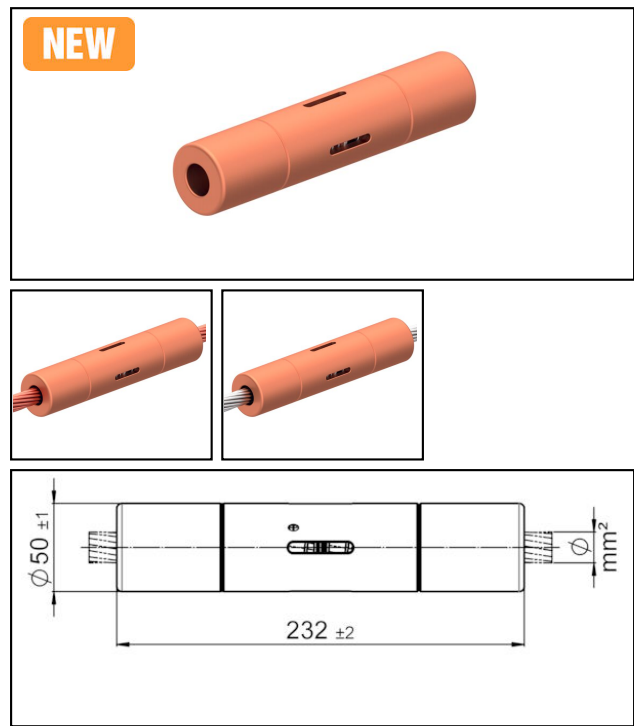

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 40 kN
Breaking load of corpus min. 170 kN

Material
Corpus CuNiSi

Legend
1) Cone INOX
2) Cone AlBz

Article-Nr.									
615.242.180	ST180	17.5	183					2.81	1

Technical Specifications: **Cone connector KV232**

Article No.	615.242.180
Rail product name	ST180
Catenary wire diameter	17.5 mm
Catenary wire section	183 mm ²
comment	1
Commercial specification	
Customs number	85359000
country of origin	undefined
Texte	
comment	1
Logistic specification	
Kilo / piece	2.81 kg

