


Messenger wire and contact wire insulators

TSIO17

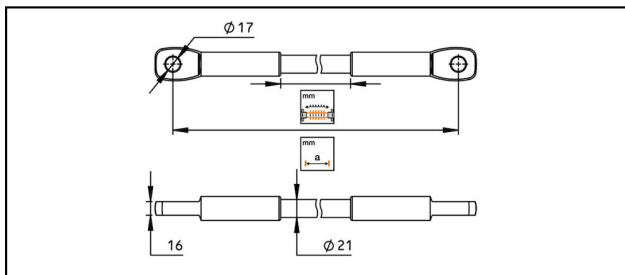

Application

Catenary insulator

Characteristics

SML: 100 kN

Nominal working tensile load 40 kN

Material

Stainless steel, fiberglass rod PTFE coated

Article-Nr.	mm 	mm 							Kg 
657.026.000	550	300							1.2
657.012.725	1750	1500							2.1
657.013.728	2250	2000							2.5
657.014.716	1350	1100							1.8
657.027.000	850	600							1.4
657.022.000	950	700							1.5
657.020.715	1050	800							1.6
657.008.724	2750	2500							2.9

Technical Specifications: **TSIO17**

	657.026.000	657.012.725	657.013.728	657.014.716
Length a	550 mm	1750 mm	2250 mm	1350 mm
Creeping distance	300 mm	1500 mm	2000 mm	1100 mm
Specified mechanical load (SML)	100 kN			
Commercial specification				
Customs number	85353000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.2 kg	2.1 kg	2.5 kg	1.8 kg

	657.027.000	657.022.000	657.020.715	657.008.724
Length a	850 mm	950 mm	1050 mm	2750 mm
Creeping distance	600 mm	700 mm	800 mm	2500 mm
Specified mechanical load (SML)	100 kN			
Commercial specification				
Customs number	85353000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.4 kg	1.5 kg	1.6 kg	2.9 kg

