


Interception components

■ **FL 35** Conductor holder for flat tiles

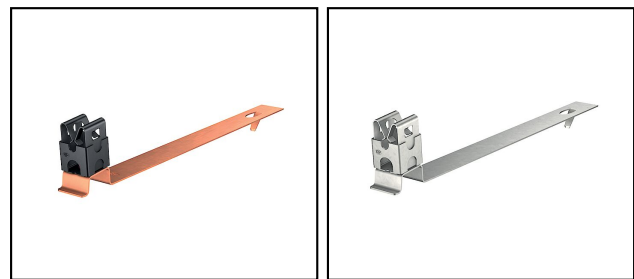

**Characteristics**  
With Quadro wire holder, swivelling, preassembled for wire Ø 6mm

**Legend**  
a) Quadro of black Inox A2

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 225.034.000 | 156 940 850 | Cu                                                                                | 195                                                                               | 6/8/9/10                                                                          |  |  |  |  | a)                                                                                  | 50                                                                                  |

Technical Specifications: **Conductor holder for flat tiles FL 35**

|                          |                      |
|--------------------------|----------------------|
| Article No.              | 225.034.000          |
| Material                 | Cu                   |
| Length a                 | 195 mm               |
| Wire diameter            | 6/8/9/10             |
| Mounting method          | To hang in           |
| Mounting type conductor  | With snap clamp      |
| Material of holder       | Stainless steel (A2) |
| Application              | Roof surface pitched |
|                          |                      |
| comment                  | a)                   |
| Commercial specification |                      |
| Customs number           | 85389000             |
| country of origin        | CH                   |
| Texte                    |                      |
| comment                  | a)                   |
| Logistic specification   |                      |
| VPE Weight               | 2.86 kg              |

