


Conical coupler

KV166 Cone connector

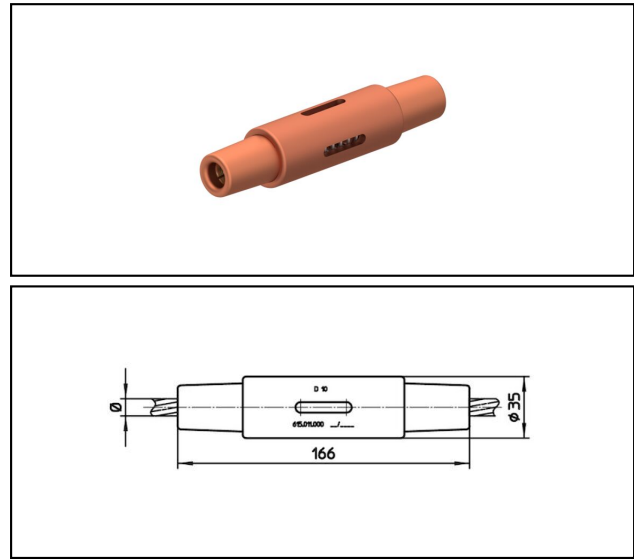

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AIBz

Legend
1) Colour code

Article-Nr.									
615.218.000	11.25	72	S72					0.71	1

Technical Specifications: **Cone connector KV166**

Article No.	615.218.000
Catenary wire diameter	11.25 mm
Catenary wire section	72 mm ²
Rail product name	S72
comment	1
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	0.71 kg

