


Conical coupler

■ **RV156** Conical coupling

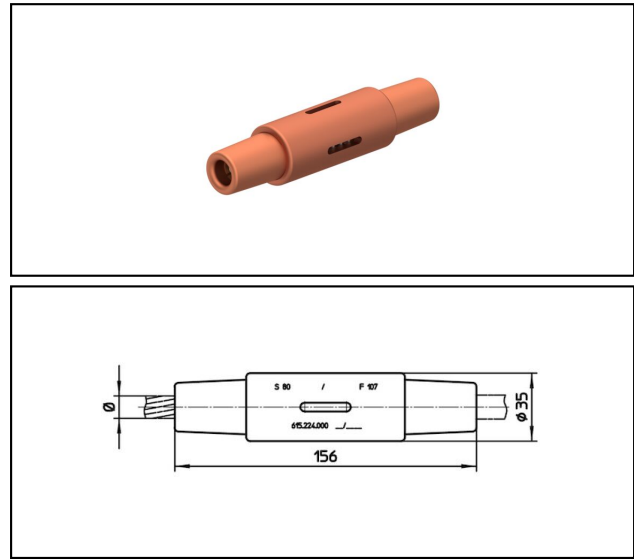

Application
Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AIBz

Legend
1) Sealed

Article-Nr.									
615.024.000	S85/D8	7.9 - 12.75	85	8	50			0.69	

Technical Specifications: **Conical coupling RV156**

Article No.	615.024.000
Rail product name	S85/D8
Catenary wire diameter	7.9 - 12.75 mm
Catenary wire section	85 mm ²
Contact wire diameter	8 mm
Contact wire section	50 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.69 kg

