


Conical coupler

RV156 Conical coupling

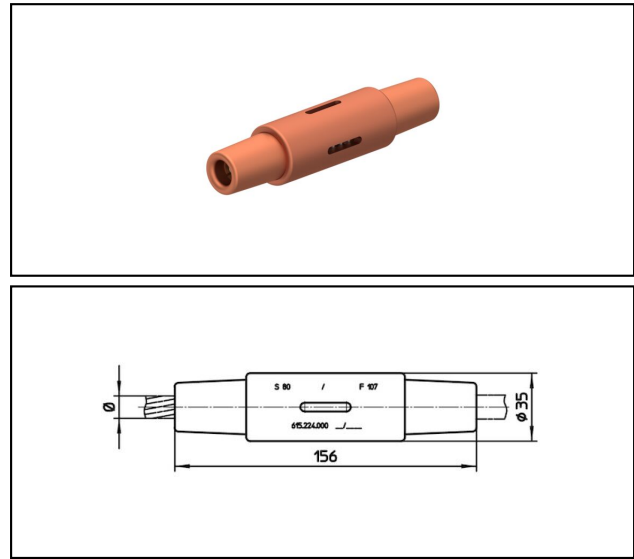

Application
Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AIBz

Legend
1) Sealed

Article-Nr.									
615.018.000	S95/72	12.8	95	9.6	72			0.69	1

Technical Specifications: **Conical coupling RV156**

Article No.	615.018.000
Rail product name	S95/72
Catenary wire diameter	12.8 mm
Catenary wire section	95 mm ²
Contact wire diameter	9.6 mm
Contact wire section	72 mm ²
comment	1
Commercial specification	
Customs number	85359000
country of origin	CH
Texte	
comment	1
Logistic specification	
Kilo / piece	0.69 kg

