


Conical coupler

KV166

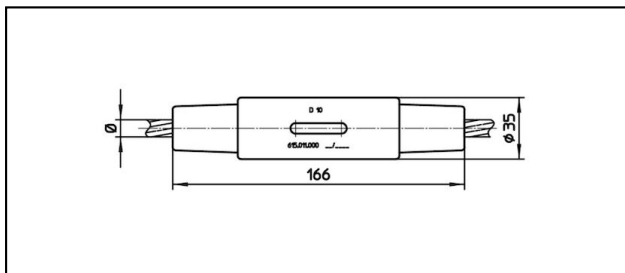

Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) Colour code

Article-Nr.									
615.218.000	11.25	72	S72					0.71	1
615.011.000	9.8	65	D10					0.71	

Technical Specifications: **KV166**

	615.218.000	615.011.000
Catenary wire diameter	11.25 mm	9.8 mm
Catenary wire section	72 mm²	65 mm²
Rail product name	S72	D10
Commercial specification		
Customs number	85359000	
country of origin	CH	
Logistic specification		
Kilo / piece	0.71 kg	

