
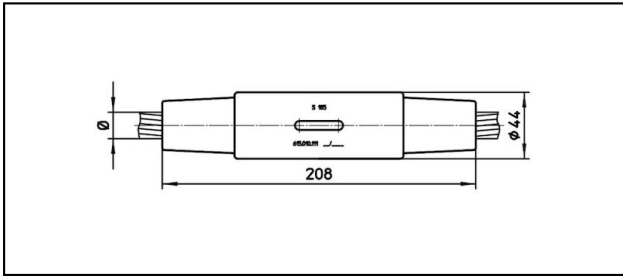


Conical coupler

KV208

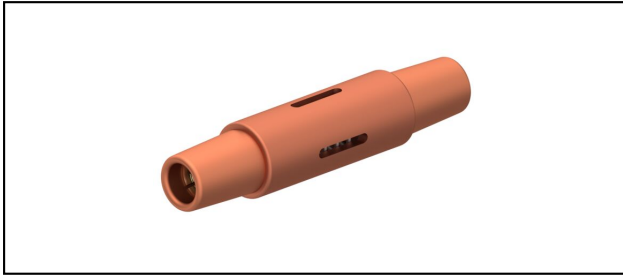

Application

Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics

Service load min. 3 kN / max. 25 kN

Material

Corpus CuNiSi / Collet AIBz

Legend

1) Colour code

Article-Nr.									
615.239.000	S240	21	240	100				1.5	
615.239.020	S126	14.5	126	100				1.68	
615.209.000	S161	16.75	161	80				1.55	
615.220.000	S161	16.75	161	80				1.55	1
615.010.111	S185	17.5	185	80				1.55	
615.210.000	S202	18.75	202	80				1.55	
615.214.000	S202	18.75	202	80				1.55	1
615.240.000	S253	21	253	80				1.4	

Technical Specifications: **KV208**

	615.239.000	615.239.020	615.209.000	615.220.000
Rail product name	S240	S126	S161	
Catenary wire diameter	21 mm	14.5 mm	16.75 mm	
Catenary wire section	240 mm²	126 mm²	161 mm²	
Minimum breaking load	100 kN		80 kN	
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.5 kg	1.68 kg	1.55 kg	

	615.010.111	615.210.000	615.214.000	615.240.000
Rail product name	S185	S202		S253
Catenary wire diameter	17.5 mm	18.75 mm		21 mm
Catenary wire section	185 mm²	202 mm²		253 mm²
Minimum breaking load	80 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.55 kg			1.4 kg

