


Conductor connections and junctions

■ PA 89 Connection terminal

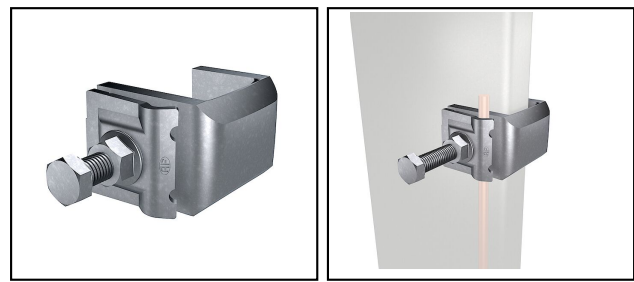

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|
| 270.050.001 | 156 804 000 | H                                                                                 | InoxA4                                                                            | 2 - 16                                                                            | 6 - 10                                                                            |  |  |  |  | 25                                                                                  |

Technical Specifications: **Connection terminal PA 89**

|                                   |               |
|-----------------------------------|---------------|
| Article No.                       | 270.050.001   |
| Approved class H / N (EN 62561-1) | H             |
| Material                          | InoxA4        |
| Clamping range flat               | 2 - 16 mm     |
| Wire diameter                     | 6 - 10 mm     |
| Clamping range                    | 20 mm         |
| Type of connector                 | Access-clip   |
| Type of fastening screws          | Hexagon screw |
| Surface protection                | unbehandelt   |
| required torque                   | 12 N·m        |
| Commercial specification          |               |
| Customs number                    | 85389000      |
| country of origin                 | CH            |
| Logistic specification            |               |
| VPE Weight                        | 5.31 kg       |

