


Conductor connections and junctions

■ AV 10 Crimping sleeve DIN

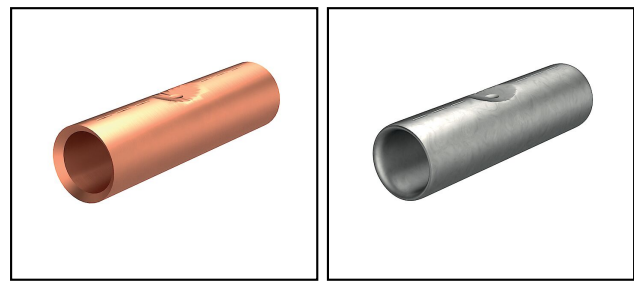

**Characteristics**  
For hexagonal pressing

| Article-Nr. | E-Number |  |  |  |  |  |  |  |  |  |
|-------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|
| 414.061.551 |          |                                                                                   | ok                                                                                | CuvSn                                                                             | 14                                                                                | 10                                                                                | 50                                                                                  |  |  | 10                                                                                  |

Technical Specifications: **Crimping sleeve DIN AV 10**

|                                  |                      |
|----------------------------------|----------------------|
| Article No.                      | 414.061.551          |
| Suitable for use in soil         | ok                   |
| Material                         | CuvSn                |
| KZ size of insert for crimp tool | 14                   |
| Wire diameter                    | 10 mm                |
| Nominal cross section conductor  | 50 mm²               |
| Surface protection               | Tinned               |
| Nominal cross section            | 50 mm²               |
| Useful for stranded conductors   | Yes                  |
| Model                            | DIN-version          |
| Number of branches               | 2                    |
| For pull protected connections   | No                   |
| Sleeve form                      | Short                |
| Suitable for solid cores         | Yes                  |
| Voltage level                    | Up to 15 kV          |
| Suitable for round conductors    | Yes                  |
| Oil stop/centre bar              | No                   |
| Insulation                       | None                 |
| Type of connection               | Percussion connector |
| Commercial specification         |                      |
| Customs number                   | 85389000             |
| country of origin                | CE                   |
| Logistic specification           |                      |
| VPE Weight                       | 0.44 kg              |

