


Conductor connections and junctions

RE 47 Cross and parallel connection

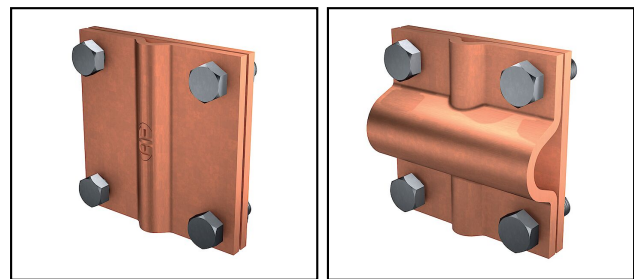

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|
| 265.002.420 | 156 940 680 | H                                                                                 | ok                                                                                | Cu                                                                                | M8x25                                                                             | 8-12                                                                              | 40x5                                                                                |  |  | 10                                                                                  |

Technical Specifications: **Cross and parallel connection RE 47**

|                                   |                                                |
|-----------------------------------|------------------------------------------------|
| Article No.                       | 265.002.420                                    |
| Approved class H / N (EN 62561-1) | H                                              |
| Suitable for use in soil          | ok                                             |
| Material                          | Cu                                             |
| Screw                             | M8x25                                          |
| Wire diameter                     | 8-12                                           |
| Band size                         | 40x5                                           |
| Type of connector                 | T-/cross-/parallel connector                   |
| Suitable for connection           | Round conductor Rd 7-10 / flat conductor FI 40 |
| Type of fastening screws          | Hexagon screw                                  |
| Surface protection                | unbehandelt                                    |
| Short circuit current             | 20 kA/1s                                       |
| required torque                   | 12 N·m                                         |
| Commercial specification          |                                                |
| Customs number                    | 85389000                                       |
| country of origin                 | CE                                             |
| Logistic specification            |                                                |
| VPE Weight                        | 3.996 kg                                       |

