


Conductor connections and junctions

■ AV 5 Derivation clamp

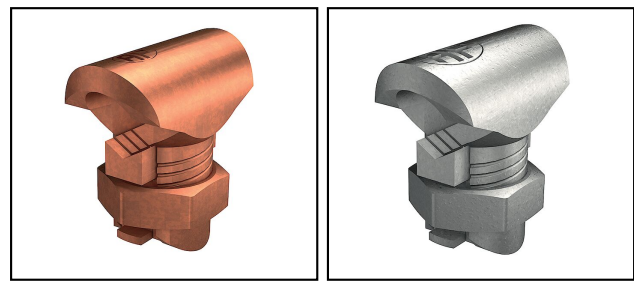

**Legend**  
Rough contact areas, high mechanical stability  
a) With security strips

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 125.156.104 | 156 206 110 |                                                                                   | ok                                                                                | Cu                                                                                |                                                                                   | 95                                                                                |  |  | a)                                                                                  | 25                                                                                  |

Technical Specifications: Derivation clamp AV 5

|                                               |                  |
|-----------------------------------------------|------------------|
| Article No.                                   | 125.156.104      |
| Suitable for use in soil                      | ok               |
| Material                                      | Cu               |
| Nominal cross section conductor               | 95 mm²           |
| Nominal cross section branch conductor, SE/RE | 50 - 95 mm²      |
| Nominal cross section main conductor, SM      | 95 mm²           |
| Clamping channel opening branch conductor     | beidseitig offen |
| Type of connection                            | Screw connector  |
| Material branch conductor                     | Kupfer           |
| Clamping channel opening main conductor       | beidseitig offen |
| Nominal cross section branch conductor, SM/RM | 50 - 95 mm²      |
| Material main conductor                       | Kupfer           |
| Terminal insulated                            | No               |
| Nominal cross section main conductor, SE      | 95 mm²           |
|                                               |                  |
| comment                                       | a)               |
| Commercial specification                      |                  |
| Customs number                                | 85389000         |
| country of origin                             | CH               |
| Texte                                         |                  |
| comment                                       | a)               |
| Logistic specification                        |                  |
| VPE Weight                                    | 4.126 kg         |

