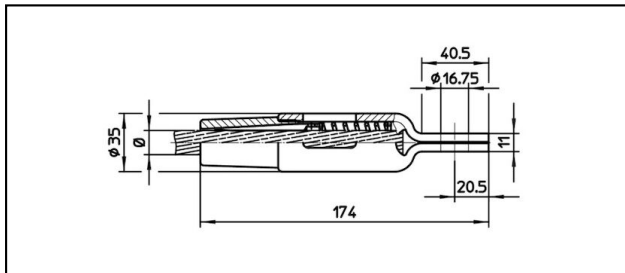
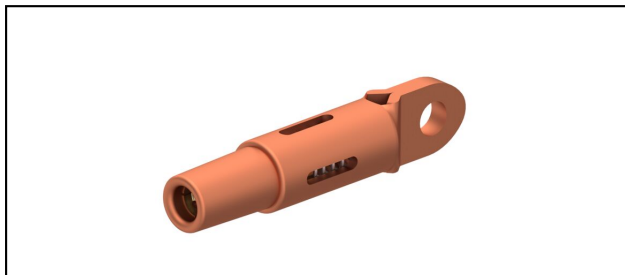


Eyelet collar sockets CuNiSi

■ OCK174

**Application**

Cu, Cu-steel or Bz tensioned cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz

Article-Nr.									
615.196.105	FD120			12.9	120				0.62
615.160.105	S120	14	120						0.64
615.159.106	FD150			14.5	150				0.63
615.167.158	FD161			14.5	161				0.63
615.161.106	S150	15.8	150						0.62

Technical Specifications: **OCK174**

	615.196.105	615.160.105	615.159.106	615.167.158
Rail product name	FD120	S120	FD150	FD161
Catenary wire diameter		14 mm		
Catenary wire section		120 mm²		
Contact wire diameter	12.9 mm		14.5 mm	
Contact wire section	120 mm²		150 mm²	161 mm²
Commercial specification				
Customs number	85359000			0
country of origin	CH			undefined
Logistic specification				
Kilo / piece	0.62 kg	0.64 kg	0.63 kg	

	615.161.106
Rail product name	S150
Catenary wire diameter	15.8 mm
Catenary wire section	150 mm ²
Contact wire diameter	
Contact wire section	
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.62 kg

