


Cable droppers

■ SHTF1/10V Feeding, adjustable

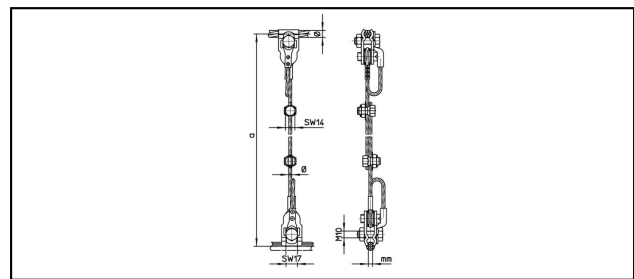

**Application**  
Suspension for contact wire, current feeding

**Characteristics**  
Other lengths and contact wire grooves on request

**Material**  
Clamp CuNiSi / Wire Bz 2

| Article-Nr. |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 625.153.595 | 9 - 12.5                                                                          | 50 - 95                                                                           | 3.75 - 8.5                                                                        | 600 - 1000                                                                        | 4.5                                                                               | 10                                                                                  | 3                                                                                   | 0.509                                                                               |

Technical Specifications: **Feeding, adjustable SHTF1/10V**

|                          |               |
|--------------------------|---------------|
| Article No.              | 625.153.595   |
| Length a                 | 600 - 1000 mm |
| Catenary wire diameter   | 9 - 12.5 mm   |
| Catenary wire section    | 50 - 95 mm²   |
| Contact wire groove      | 3.75 - 8.5 mm |
| Dropper wire diameter    | 4.5 mm        |
| Dropper wire section     | 10 mm²        |
| Slipping force           | 3 kN          |
| Commercial specification |               |
| Customs number           | 85359000      |
| country of origin        | CH            |
| Logistic specification   |               |
| Kilo / piece             | 0.509 kg      |

