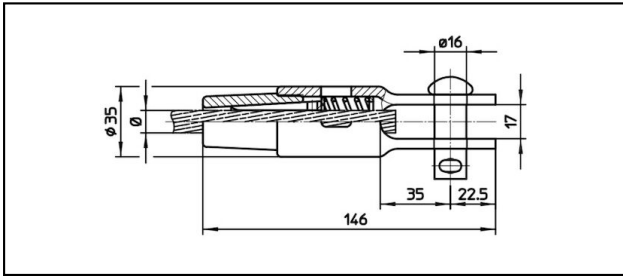
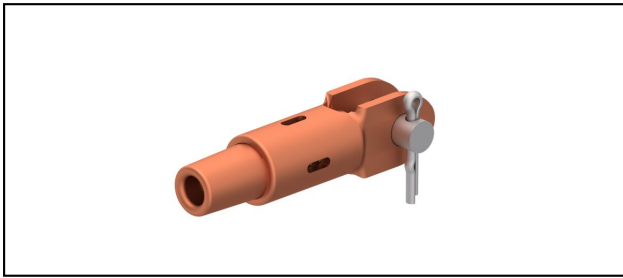


Forked collar sockets

■ GCK146/17

**Application**

Cu, Cu-steel or Bz tensioned cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AlBz resp. CuNiSi

Article-Nr.	«N»	mm Ø	mm²	mm Ø	mm²				Kg
615.030.041	D5	4.9	5						0.62
615.031.002	D6	5.9	6						0.62
615.032.027	D8	7.9	8						0.61
615.036.102	S50	8.9	50						0.61
615.033.103	FD70			9.6	70				0.61
615.034.150	S70-FD85	10.8	70	10.8	85				0.61
615.046.150	S85	11.8	85						0.6
615.035.151	FD107			12.8	107				0.6
615.038.104	S95	12.8	95						0.6

Technical Specifications: **GCK146/17**

	615.030.041	615.031.002	615.032.027	615.036.102
Rail product name	D5	D6	D8	S50
Catenary wire diameter	4.9 mm	5.9 mm	7.9 mm	8.9 mm
Catenary wire section	5 mm²	6 mm²	8 mm²	50 mm²
Contact wire diameter				
Contact wire section				
Commercial specification				
Customs number	85359000			
country of origin	undefined	CH		
Logistic specification				
Kilo / piece	0.62 kg		0.61 kg	

	615.033.103	615.034.150	615.046.150	615.035.151
Rail product name	FD70	S70-FD85	S85	FD107
Catenary wire diameter		10.8 mm	11.8 mm	
Catenary wire section		70 mm²	85 mm²	
Contact wire diameter	9.6 mm	10.8 mm		12.8 mm
Contact wire section	70 mm²	85 mm²		107 mm²
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.61 kg		0.6 kg	

	615.038.104
Rail product name	S95
Catenary wire diameter	12.8 mm
Catenary wire section	95 mm ²
Contact wire diameter	
Contact wire section	
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.6 kg