


Forked collar sockets

GCK146/17 Spc.

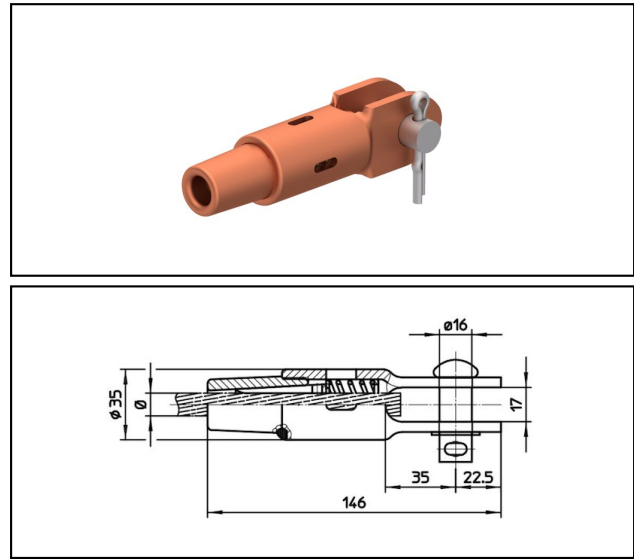

Application
Cu, Cu-steel or Bz tensioned cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AlBz resp. CuNiSi

Legend
1) With sealing and washer

Article-Nr.									
615.049.102	48	8.9	48					0.61	1
615.053.103	72	9.6	72					0.61	1
615.052.100	104	11.3	104					0.61	1
615.050.104	95	12.8	95					0.61	1
615.051.100	FD100			12.8	100			0.61	1

Technical Specifications: **GCK146/17 Spc.**

	615.049.102	615.053.103	615.052.100	615.050.104
Rail product name	48	72	104	95
Catenary wire diameter	8.9 mm	9.6 mm	11.3 mm	12.8 mm
Catenary wire section	48 mm²	72 mm²	104 mm²	95 mm²
Contact wire diameter				
Contact wire section				
Commercial specification				
Customs number	0	85359000		
country of origin	undefined	CH		
Logistic specification				
Kilo / piece	0.61 kg			

	615.051.100
Rail product name	FD100
Catenary wire diameter	
Catenary wire section	
Contact wire diameter	12.8 mm
Contact wire section	100 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.61 kg