


Forked collar sockets

GCL227/21 Spc.

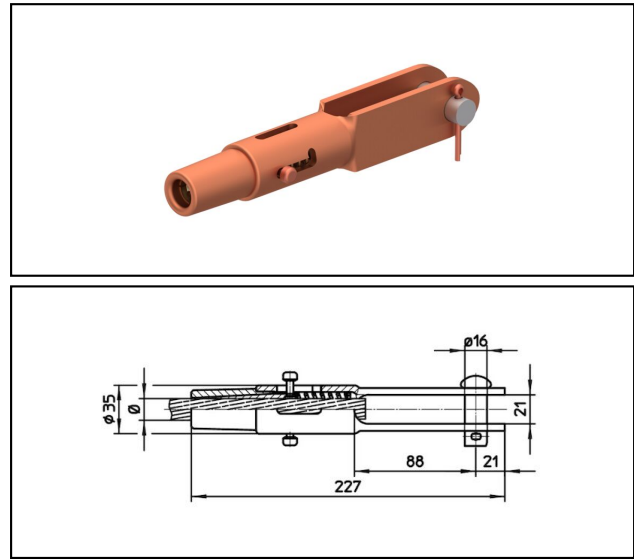

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
With Cu-Cotter pin  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AlBz resp. CuNiSi

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|--|-------------------------------------------------------------------------------------|
| 615.119.106 | S150                                                                              | 15.8                                                                              | 150                                                                               |  |  |  |  |  | 0.89                                                                                |



Technical Specifications: **GCL227/21 Spc.**

|                               |                     |
|-------------------------------|---------------------|
|                               | 615.119.106         |
| <b>Rail product name</b>      | S150                |
| <b>Catenary wire diameter</b> | 15.8 mm             |
| <b>Catenary wire section</b>  | 150 mm <sup>2</sup> |
| Commercial specification      |                     |
| <b>Customs number</b>         | 85359000            |
| <b>country of origin</b>      | CH                  |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 0.89 kg             |