


Section insulators

■ HS3 Section insulator

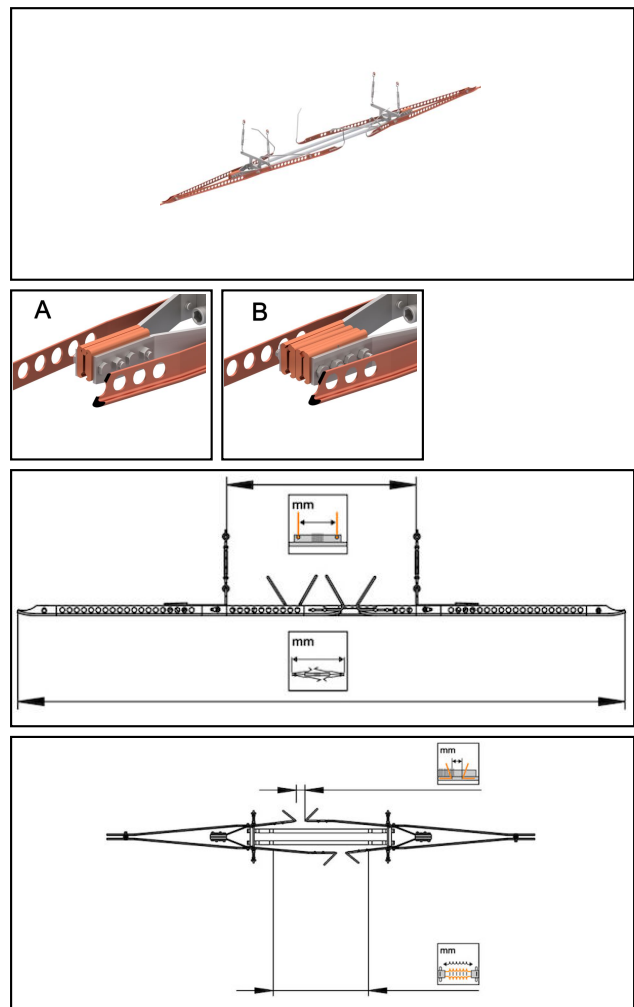

Application
For regional trains and heavy rail
Maximum speed up to 200 km/h

Material
GRP/PTFE, Cu, CuNiSi, stainless steel

Legend
A) For 1 contact wire systems
B) For 2 contact wire systems

Article-Nr.									
655.500.001	120 - 178	5.6 - 6.9	600	850	1100	55	2700	8-30	A

Accessories									
 MH HS3									
Article-Nr.									

Accessories									
 SAL									
Article-Nr.									
696.016.010	Al	1610							1.2



Technical Specifications: **Section insulator HS3**

Article No.	655.500.001
Contact wire section	120 - 178 mm²
Contact wire groove	5.6 - 6.9 mm
Creeping distance	600 mm
Length between suspension	850 mm
Length between contact wire	1100 mm
Arcing horn distance	55 mm
Total length	2700 mm
Recommended service load	8-30
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	120 kN
comment	A
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	A
Logistic specification	
Kilo / piece	16 kg

