


Generators combiner boxes

GAK 212 PG Junction box PV

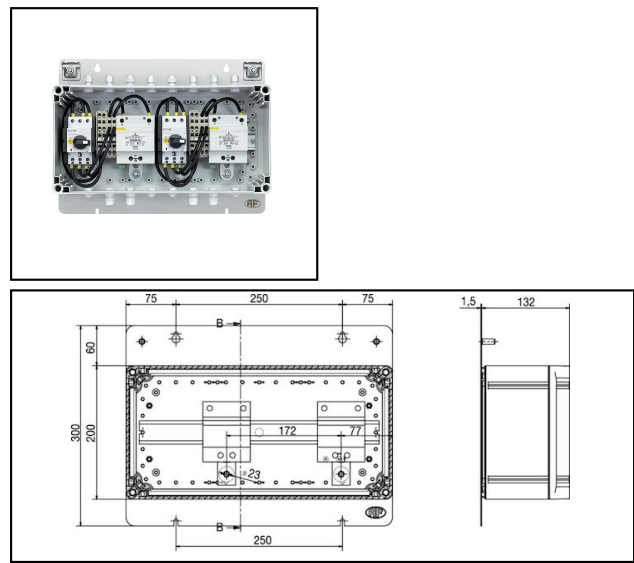

Characteristics
Generator boxes with preassembled surge protection and grounding plate:

- Legend**
- a) type 1+2 GAK + DIS 60 VGPVS-1000-4ST-2MPP
 - b) type 1+2 GAK + DIS 50 PVS-1000-4ST-2MPP
 - c) type 1+2 GAK + DIS 50 VGPVS-1000-4ST-2MPP
 - d) type 2 GAK + DIS 50 PV-1000-4ST-2MPP

Article-Nr.	E-Number	 Typ/Type	V U_C	kA I_{imp}	kA I_{max}	ns t_A	kV U_P	 mm ²		
296.049.357	969 111 684	T1 / T2	≤1200VDC	12.5	40	≤25	2.8	6 - 35	a)	1
296.049.957	969 111 714	T1 / T2	≤1200VDC	6.25	40	≤25	2.6	2.5 - 25	b)	1
296.049.557	969 111 694	T1 / T2	≤1200VDC	6.25	40	≤25	2.8	2.5 - 25	c)	1
296.049.757	969 111 704	T2	≤1200VDC	5	40	≤25	2.6	2.5 - 25	d)	1

Technical Specifications: Junction box PV GAK 212 PG

	296.049.357	296.049.957	296.049.557	296.049.757
SPD type	T1 / T2			T2
Number of poles	2			
max. discharge current (I _{max})	40 kA			
Nominal line voltage U _n DC	1000 V			
Impulse current [I _{imp}]_(10/350)	12.5 kA	6.25 kA		5 kA
Discharge current max. (8/20) μs [I _{max}]	40 kA		60 kA	
Nominal discharge surge current (8/20)	20 kA	15 kA		15 kA
Voltage protection level [U _p]	2.8 kV	2.6 kV	2.8 kV	2.6 kV
Protection level max. (at 5kA)	2.1 kV			
Protection level max. (at 12.5kA)	2.3 kV			
Operation voltage max. [U _c]	≤1200VDC			
Operating current [I _c]	0 kA		0 kA	
Follow current [I _F]	0 kA			
follow current extinguishing capability [I _{fi}]	Unendlich kA eff		Unendlich kA eff	
Response time [t _a]	≤25 ns			
Short circuit resistance (I _{cw})	25 kA	1 kA	10 kA	1 kA
Fault indication	Mechanisch, Rot	mechanisch, Rot	Mechanisch, Rot	mechanisch, Rot
Temperature range	-40 - 85			
Total discharge current (8/20) (L N-PE)		60 kA		60 kA
Degree of protection	IP20			
Signaling on the device	Optic			
Signaling contact	Yes			
Connection cross section solid / stranded max.	1.5 mm²			
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V/0,5 A (AC) / - 30 V / 2 A (DC)	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V/0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes			
System configuration DC	Yes			
Construction size	4 modular spacing	3 modular spacing		
Nominal discharge current [I _n]	20/Pol	15/Pol		
Nominal cross section conductor	6 - 35 mm²	2.5 - 25 mm²	2.5 - 25	2.5 - 25 mm²
Integrated backup fuse	No			
Exhausting	No			
Mounting method	DIN rail (top hat rail) 35 mm			
Degree of protection (IP)	IP20			
Casing				
degree of protection	IP65			
number of modules	20			
contract rail	DIN-Schiene			
String / MPP	4ST-2MPP			
inputs PG / MC4	PG			
outputs PG / MC4	PG			
Ground base plate	Yes			
Switch				
Switching capacity voltage max. U _{oc} Max.	1000 V			
Switching current max. I _{sc} Max.	30 A			
Cross-sectional area	6 mm²			
Standards				
Test standards USA	UL 1449 ed.3			
Test standards Europe	FprEN 50539-11	EN 50539-11		
Test standards France	UTE C61-740-51			
Homologation	VDE, ÖVE und UL		VDE, ÖVE und UL	
Commercial specification				
Customs number	85372000			
country of origin	CH			
Logistic specification				
VPE Weight	5.833 kg			5.833 kg

