


Up to 25 kV

LTN25

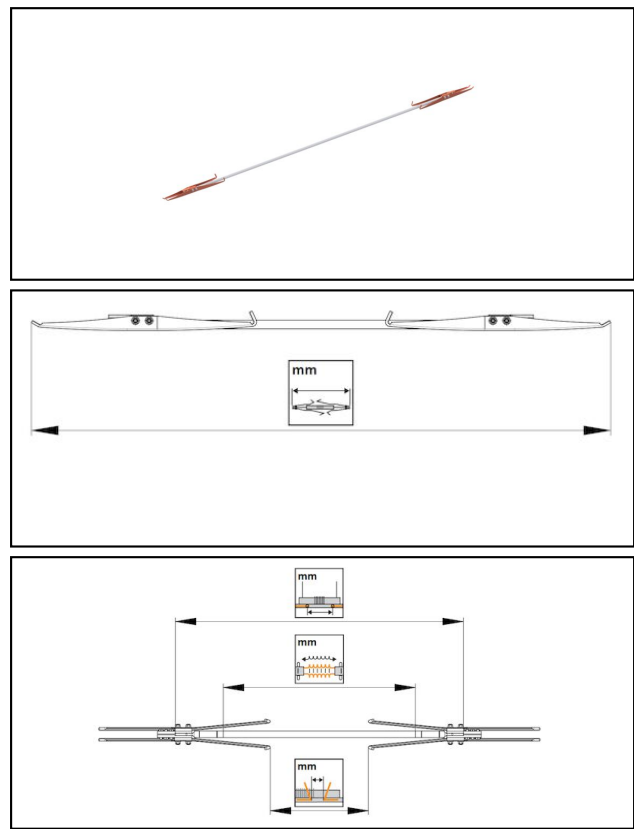

Application
 Neutral section to separate different electrical phases or systems
 For tramway and light rail
 Maximum speed up to 60 km/h

Characteristics
 Suspension is not necessary (optionally available)

Material
 GRP/PTFE, Cu, CuNiSi, stainless steel

Article-Nr.									
655.266.057	2500	2850	320	2169	3408	max.24			8.2

Accessories									
 Suspension for LT1 625.000.001									
Article-Nr.									
625.000.001								0.43	

Technical Specifications: **LTN25**

	655.266.057
Creeping distance	2500 mm
Length between contact wire	2850 mm
Arcing horn distance	2169 mm
Total length	3408 mm
Width between suspension	320 mm
Recommended service load	max.24 kN
Commercial specification	
country of origin	undefined
Logistic specification	
Kilo / piece	8.2 kg

