


Down-conductor components

AL 47 Protective spark gap

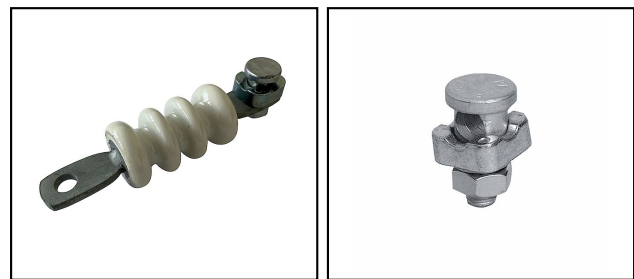

Characteristics
Closed spark gap for bridging a neighbouring position
The connection bore (of the junctions) is 11mm

Legend
a) Feeder clamp to 356.003.000

Article-Nr.	E-Number			AC/DC						
356.003.000	156 900 330	Al		AC	10000					1
356.020.000	156 900 340	StvZn	6 - 8						a)	1

Technical Specifications: **Protective spark gap AL 47**

	356.003.000	356.020.000
Material	Al	StvZn
Wire diameter		6 - 8 mm
Voltage mode	AC	
Operation voltage max. [Uc]	10000	
Suitable for connection	sonstige	
Material of connection	Stahl	
Surface protection	unbehandelt	Hot dip galvanized
Explosion-tested version	No	
Type of accessory		Bügelklemme
Connection	Flange	
Commercial specification		
Customs number	85389000	
country of origin	CE	undefined
Logistic specification		
VPE Weight	0.34 kg	0.062 kg

