


System supports SST concrete

■ SST Quattro B KL Single anchorage point

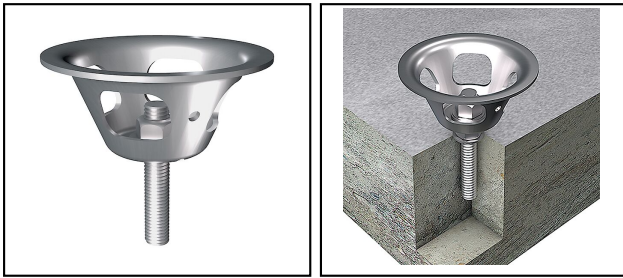

Characteristics

Single anchorage point Quattro Ø 16mm made of Inox A2 for the modular assembly with a base plate on concrete assembly with superbond mortar FIS SB 390 S incl. connection for the H-tested integration in lightning protection

Article-Nr.	E-Number									
Anchor rod KLAN 16										
380.000.219			InoxA4					M 16x190		1
Single anchorage point EAP Quattro										
310.000.007		H	InoxA2			60	135		4	10

Accessories

950.04.360										
Article-Nr.	E-Number									
950.04.360		InoxA2	M16							100

Accessories

380.000.220										
Article-Nr.	E-Number									
380.000.220									Sortmat	12

Accessories

Static Mixer 380.000.221										
Article-Nr.	E-Number									
380.000.221										1

Accessories

Connection cable FL 16										
Article-Nr.	E-Number									
280.103.011	280.103.011	H	CuvSn	16	800					10
280.103.012	156 940 390	H	CuvSn	16	1200					10