


Conductor material flat

LF 2 Strip

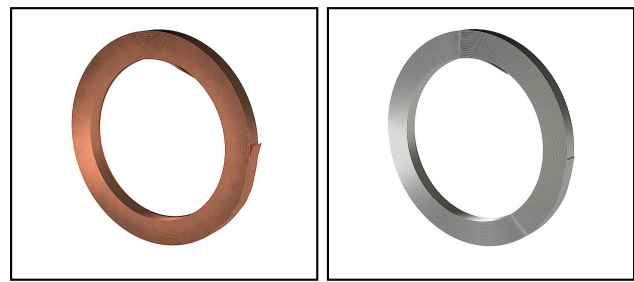

**Characteristics**  
Price on application (current daily price)

**Legend**  
a) Hot-galvanized 225gr/m2  
b) Hot-galvanized 500gr/m2, use under reserve in the ground

| Article-Nr. | E-Number    |  |       |      |     |  |  |    |    |    |
|-------------|-------------|--|-------|------|-----|--|--|----|----|----|
| 261.021.409 | 100 759 340 |  | StvZn | 40x3 | 120 |  |  | b) | 32 | 30 |



Technical Specifications: **Strip LF 2**

|                           |                     |
|---------------------------|---------------------|
| Article No.               | 261.021.409         |
| <b>Material</b>           | StvZn               |
| <b>Band size</b>          | 40x3                |
| <b>Band section</b>       | 120 mm <sup>2</sup> |
| <b>Cross section</b>      | 120 mm <sup>2</sup> |
| <b>Surface protection</b> | Hot dip galvanized  |
| <b>Thickness</b>          | 3 mm                |
|                           |                     |
| <b>comment</b>            | b)                  |
| Commercial specification  |                     |
| <b>Customs number</b>     | 72119000            |
| <b>country of origin</b>  | undefined           |
| Texte                     |                     |
| <b>comment</b>            | b)                  |
| Logistic specification    |                     |
| <b>VPE Weight</b>         | 30 kg               |