


Surge protection (Type 2)

DS 40 S Surge Protector

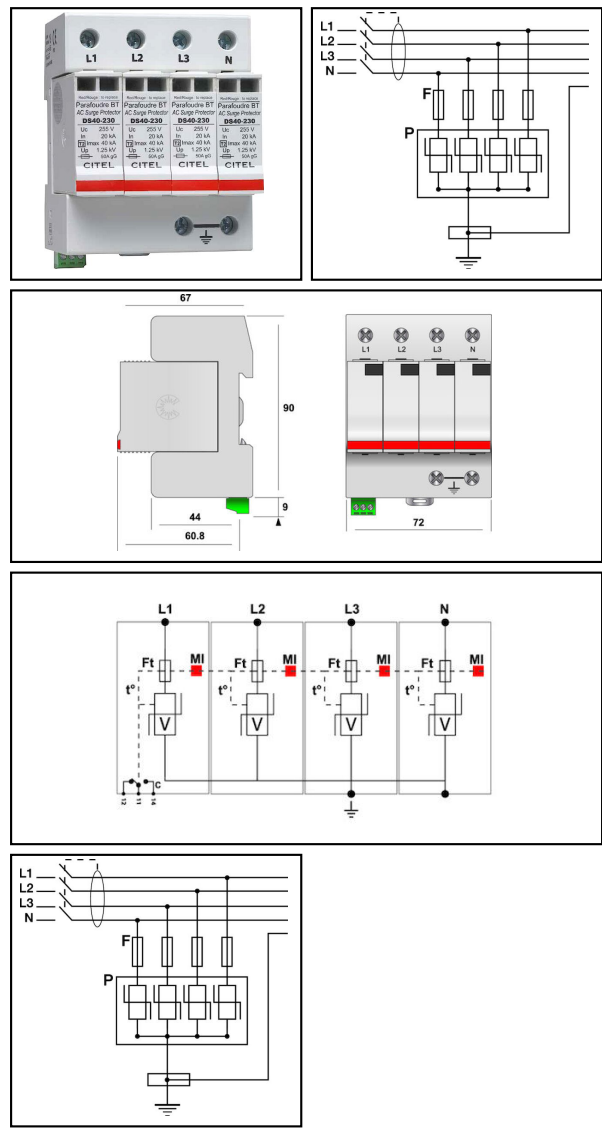

- Characteristics**
- surge protector type 2
 - $I_n = 20\text{kA}$; $I_{\text{max}} = 40\text{kA}$
 - internal disconnection, status indicator
 - pluggable module
 - remote signaling

Article-Nr.	E-Number	Typ/Type		kA I_{max}	ns t_A	kV U_P	mm ²	kA i_n		VE Emb.
296.044.011	808 411 020	T2	1	40	0	1.25	0 - 42	20	Yes	1

Accessories										
 Replacement module 296.044.000										
Article-Nr.	E-Number		Typ/Type							VE Emb.
296.044.000	808 411 030	TPE	T2						DS 40 S	1

Accessories										
 Replacement module 296.144.000										
Article-Nr.	E-Number		Typ/Type							VE Emb.
296.144.000	808 411 040	TPE	T2						DS 40 S/G	1



Technical Specifications: Surge Protector DS 40 S

Article No.	296.044.011
Construction size	1 modular spacing
SPD type	T2
Number of poles	1
max. discharge current (I _{max})	40 kA
Nominal line voltage U _n AC	230 V
Continuous voltage AC max.	275 V
Nominal frequency [fn]	50 - 60 Hz
Discharge current max. (8/20) μ s [I _{max}]	40 kA
Nominal discharge surge current (8/20)	20 kA
Voltage protection level [Up]	1.25 kV
Protection level max. (at 5kA)	0.9 kV
Follow current [IF]	0 kA
follow current extinguishing capability [Ifi]	unendlich
Response time [ta]	0
TOV-voltage L-N [UT]	440 Vac
Short circuit resistance (I _{cw})	25 kA
Fault indication	Mechanisch, Rot
Temperature range	-40 - 85 °C
Degree of protection	IP20
Fuse max. (gG)	125 A
Mounting on	Hutschiene 35 mm
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm ²
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)
System configuration	TN
Short-circuit-proof	Yes
Nominal cross section conductor	0 - 42 mm ²
Category type 2	Yes
Mounting method	DIN rail (top hat rail) 35 mm
With remote signalling contact	Yes
Nominal discharge current [In]	20/Pol
Integrated backup fuse	No
Voltage protection level L-N [Up]	1.25 kV
Degree of protection (IP)	IP20
Standards	
Homologation	VDE, ÖVE, UL
Test standards International	IEC 61643-11
Test standards USA	UL 1449 ed.3
Test standards Europe	EN 61643-11
Commercial specification	
Customs number	85363000
country of origin	undefined
Logistic specification	
VPE Weight	0.12 kg

