


Manchons d'extrémité

GCL275/25

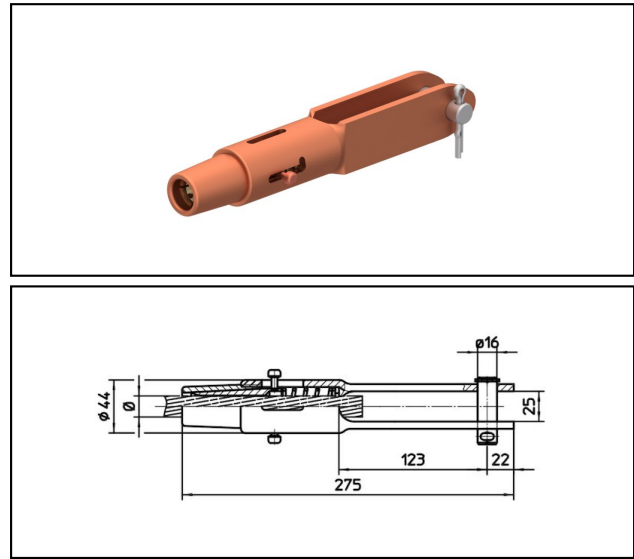

Application
Conducteurs Cu, Cu-acier ou Bz soumis à la traction

Description
Charge en service min. 3 kN / max. 25 kN
Charge de rupture du carter min. 80 kN

Matériel
Carter en CuNiSi / Cône en AlBz

Réf. article									
615.108.111	S180	17.5	180						1.55
615.208.000	S143	15.8	143						1.55
615.112.171	S160	16.8	160						1.55
615.129.000	S240	19.8	240						1.55

Caractéristiques techniques: **GCL275/25**

	615.108.111	615.208.000	615.112.171	615.129.000
ferroviaire produit nom	S180	S143	S160	S240
Diamètre câble porteur	17.5 mm	15.8 mm	16.8 mm	19.8 mm
Section câble porteurs	180 mm²	143 mm²	160 mm²	240 mm²
Spécifications commerciales				
Numéro de tarif douanier	85359000			
pays d'origine	CH			
Spécifications logistiques				
Kilo / pièce	1.55 kg			

