


Pendules à câble

SHTF4/25V

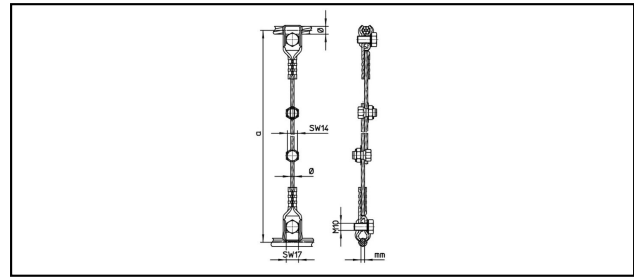

Application
Suspension pour fil de contact, équipotentiel

Matériel
Borne en CuNiSi / Cordage en Bz 2

Réf. article									
625.559.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1250	7.5	25	5		0.7
625.560.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	7.5	25	5		0.774
625.561.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	7.5	25	5		0.844

Caractéristiques techniques: **SHTF4/25V**

	625.559.000	625.560.000	625.561.000
Longueur a	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm
Diamètre câble porteur	6.5 - 12.5 mm		
Section câble porteurs	25 - 95 mm²		
Rainure du fil de contact	3 - 8.5 mm		
Diamètre fil de suspension	7.5 mm		
Section fil de suspension	25 mm²		
Force de glissade	5 kN		
Spécifications commerciales			
Numéro de tarif douanier	85359020		
pays d'origine	indéfini	CH	
Spécifications logistiques			
Kilo / pièce	0.7 kg	0.774 kg	0.844 kg

