


Pendini

SHTF4/25V

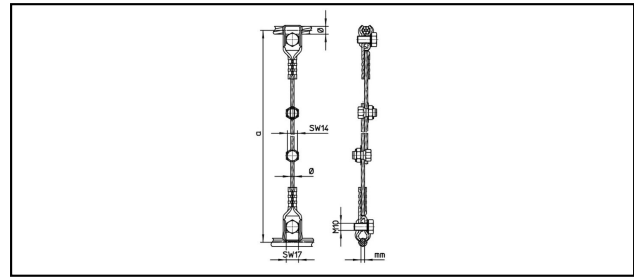

Applicazione
 Sospensione per filo di contatto, equipotenziale

Materiale
 Morsetto in CuNiSi / Cordino in Bz 2

Rif. Articolo									
625.559.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1250	7.5	25	5		0.7
625.560.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	7.5	25	5		0.774
625.561.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	7.5	25	5		0.844



Specifiche tecnici: **SHTF4/25V**

	625.559.000	625.560.000	625.561.000
Lunghezza a	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm
Diametro funi portanti	6.5 - 12.5 mm		
Sezione funi portanti	25 - 95 mm²		
Sagomatura filo di contatto	3 - 8.5 mm		
Diametro del filo di sospensione	7.5 mm		
Sezione del filo di sospensione	25 mm²		
Forza di slittamento	5 kN		
Specifiche commerciali			
Numero di tariffa doganale	85359020		
paese di origine	indeterminato	CH	
Specificazione logistica			
Chilo / pezzo	0.7 kg	0.774 kg	0.844 kg

